


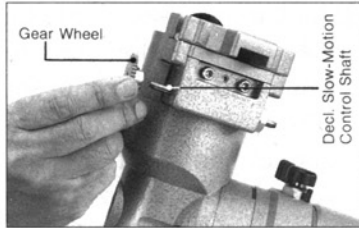
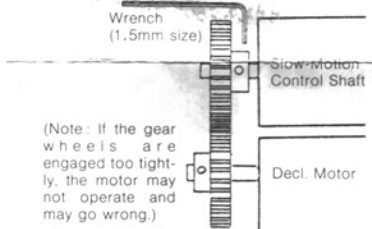
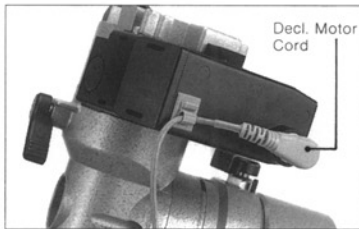
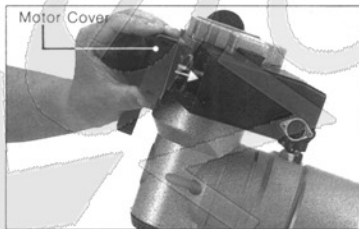
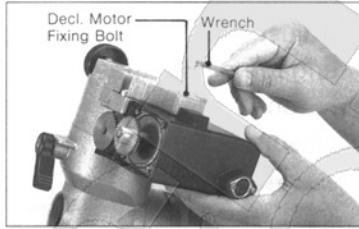
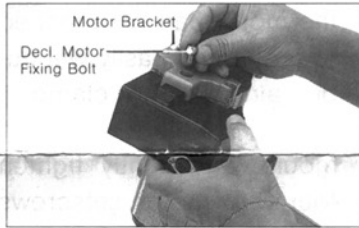


INSTALLING THE DECL. MOTOR

① Put the gear wheel onto the Decl. slow-motion control shaft and tighten the set-screw against the flat section of the shaft with the wrench (1.5mm size).

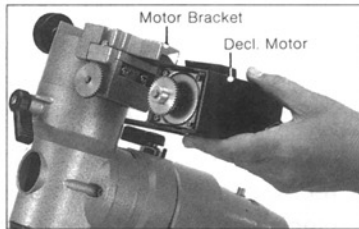

② Remove a motor cover at the side of the gear wheel from the Decl. motor. Attach the Decl. motor to the motor bracket with the Decl. motor fixing bolt while setting the gear wheels to engage each other properly.

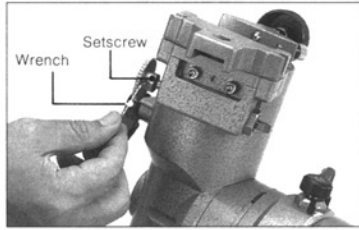

Tighten the Decl. motor fixing bolt with the wrench (5mm size).



③ Attach the motor cover to the Decl. motor by pushing it in.

④ Stick the adhesive motor cord hook on the left lower side of the motor as shown in the right picture. It holds the Decl. motor cord sideways.






⑤ Connect the Decl. motor cord (grey colour) to the motor.

INSTALLING THE R.A. MOTOR

① Put the gear wheel onto the R.A. slow-motion control shaft and tighten the set-screw against the flat section of the shaft with the wrench (1.5mm size).

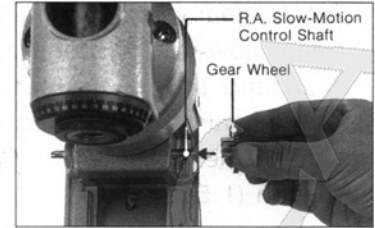

② Remove a motor cover at the side of the gear wheel from the R.A. motor by pulling it. Insert the R.A. motor fixing bolt into a bolt hole from the back side of the mount. Attach the R.A. motor to the mount with the bolt while setting the gear wheels to engage each other properly.

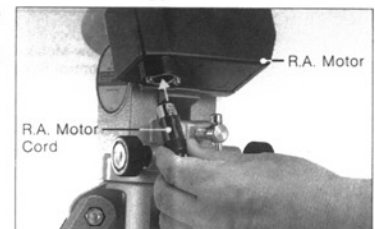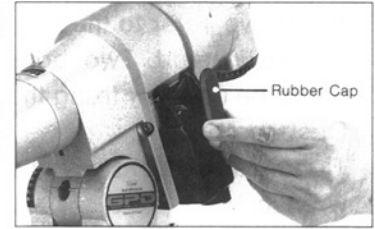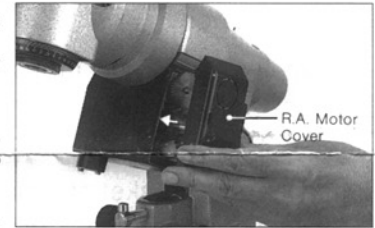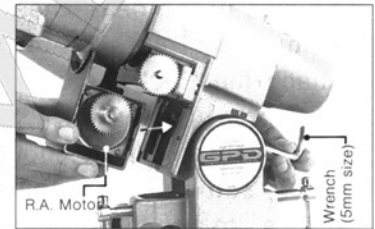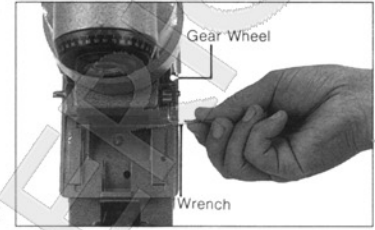


(Note: If the gear wheels are engaged too tightly, the motor may not operate and may go wrong.)

③ Attach the motor cover to the R.A. motor by pushing it in.

④ Put the rubber cap over the R.A. slow-motion control shaft.


⑤ Connect the R.A. motor cord (black colour) to the motor.

CONNECTING THE CORD TO THE SKYSENSOR 2000/2000PC

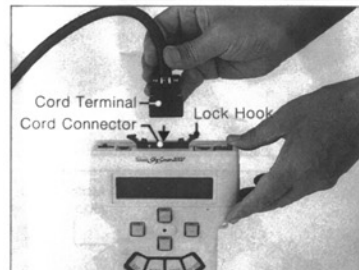

Connect the cord terminal into the Cord Jack and lock it with the hooks.

CONNECTING THE POWER CORD TO THE SKYSENSOR 2000/2000PC

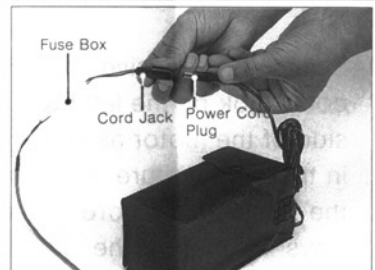

Connect the power cord plug into the cord jack.